

LAMINATION SYSTEM

Bondmaster 1600 Pro Hot/Cold - Mounter/Laminator



Max. Laminating Width 1660mm
Max. Machine Speed 0-5m/m
Roller Diameter 132mm
Machine Net Weight 320kgs
Motor Control
On/Off, Forward/Reverse, Off/Remote
Twin Digital Temp Control
up to 150 deg c
Job Meter Counter
Pressure indicator
Separate Fan Controller
Rear Pull Roller

Designed to laminate large format graphics using pressure sensitive film or thermal laminates. Simple and reliable mounting setting with roller crush compensation built in. No hassles. No surprises. Just a great product that allows the operator to do it right the first time.

Max. Mounting Thickness up to 25mm
Power Requirements 220/240v 50-60Hz
Lifting Mode Manual
Mandrel Size 76mm
Machine Dimensions
2000m (W) x 600mm (D) x 1250mm (H)



The Bondmaster 1600 Pro also features the following major design advantages

- Film tension control



- Rewind tension take up for film release paper


- Job rewind tension

- Job delivery tension

- Bottom film rewind

- Bottom film tension

- 132mm Diameter Silicone Rollers with an accurately controlled open and closing system

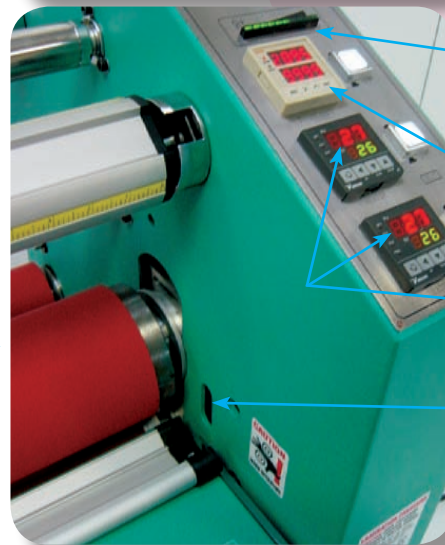


- L E D height measurement indicators for roller spacing

- Job record length

- **Twin digital Temp control**

- Equipped with infrared safety cut out switch

- Product (print) mandrel for print feeding with tensioner for full rolls of print media

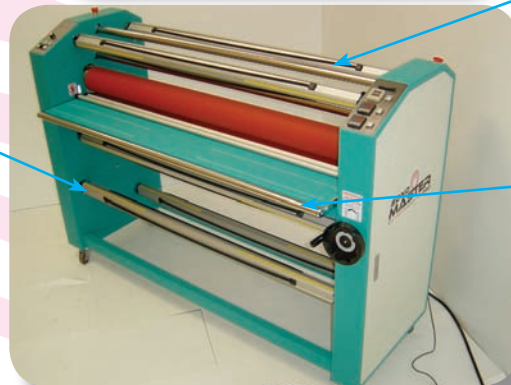


- Latest easy load non-slip film and product mandrels

- Product feed guide plates fitted with smooth chrome rollers to aid feed and eliminate scratching of products

- Emergency stop

- Resettable circuit breaker

- Full built in chassis to correct any twisting of frame

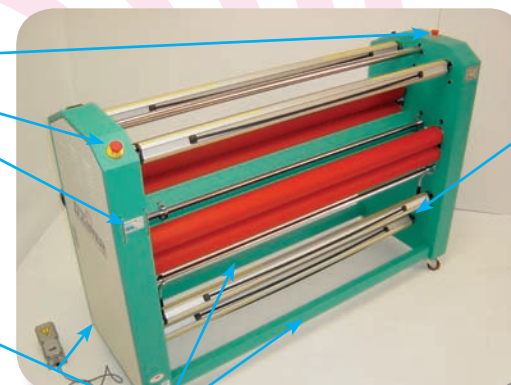

- Product (print) rewind unit with tension adjustment clutch